

General Relay

Main technical parameter



60.13-1




70.2




70.3

Specifications	Model	60.13-1	70.2	70.3
Terminal layout		3Z	2Z	3Z
Contact capacity	AC	10A 250V	10A 250V	10A 250V
	DC	10A 30V	10A 30V	10A 30V
Contact resistance(mΩ)		≤50mΩ	≤50mΩ	≤50mΩ
Insulation resistance(MΩ)		≥500MΩ	≥500MΩ	≥500MΩ
Dielectric strength	BOC	1500VAC	1500VAC	1500VAC
	BCC	1500VAC	1500VAC	1500VAC
Coil nominal voltage	AC	6 to 380V	6 to 380V	6 to 380V
	DC	6 to 220V	6 to 220V	6 to 220V
Coil nominal power	AC	2.0VA to 2.8VA	2.0VA to 2.8VA	2.0VA to 2.8VA
	DC	≤1.5W	≤1.5W	≤0.5W
Electrical life(OPS)		10 ⁵	10 ⁵	10 ⁵
Mechanical life(OPS)		10 ⁷	10 ⁷	10 ⁷
Operating temperature(°C)		-40~+60	-40~+60	-40~+60
Weight(g)		≤80	≤85	≤85
Mounting methods		Outlet	Outlet	Outlet


Dimension

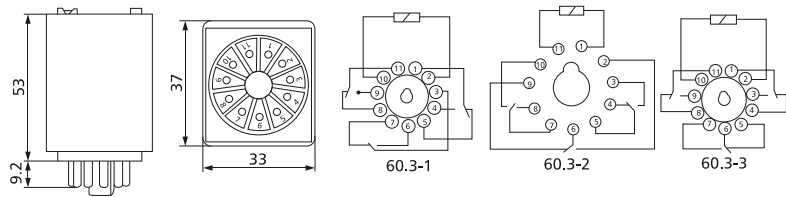

60.13-1

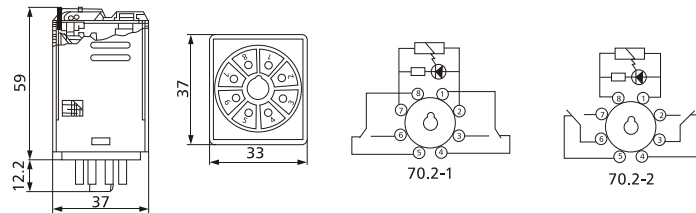

70.2

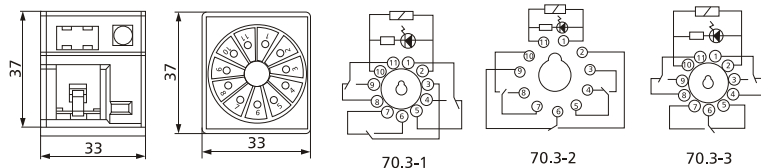

70.3