

## Copper Terminal Block Series

### Material


PA, Polyamide 66,94V-2 grade, inflaming ratarding, good resist dissolve, good bounce impact force,  
Working Temperature: -30C~110C

PC, Polycarbonate, good glossniess, inflaming retarding, bouce impact force and thermal stability is great,  
Working Temperature: -60C~135C

Brass, screw is Iron plated zinc;

Voltage: 250V;

Color: clear/grey color.

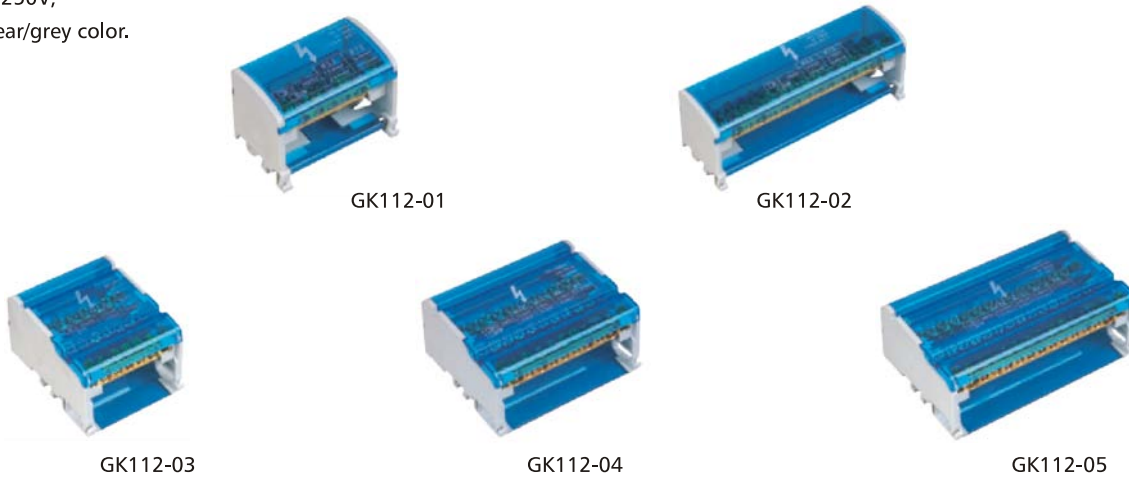

Type	Specifications	installation size(mm)	Overall size(mm)	Copper The cross-sectional area (mm)
GK112-01	2P-7	45 x M4	66 x 45 x 51	6.5 x 12
GK112-02	2P-15	112 x M4	133 x 45 x 51	6.5 x 12
GK112-03	4P-7	45 x M4	66 x 88 x 51	6.5 x 12
GK112-04	4P-11	80 x M4	100 x 88 x51	6.5 x 12
GK112-05	4P-15	112 x M4	133 x 88 x51	6.5 x 12

## Board Lock

